

ACRYLIOUTDOOR DRALON









ENDURANCE THROUGH THE YEARS

PROTECTION, is entering in a new era by developing and enriching its range of acrylic technical fabrics with the innovative PROACRYL series.

PROTECTION presents the **PROACRYL** series, a high quality acrylic outdoor fabric made of **solution dyed acrylic yarn** and specially treated, offering:

- Intense colour brilliance
- No fading colours remain bright and luminous for many years
- High UV fastness, and thus no solidity loss
- Best weather-proof outdoor fiber
- Outstanding dirt and water repellency
- Pleasant textile feeling
- Less wrinkles or creases

PROACRYL is perfectly applied to, various shading systems such as the cassette, the pergola, the canopies, the awnigns with folding arms as well as in boat and furniture covers.

Technical Data

2

Composition	100% solution dyed acrylic
Width	120cm
Weight	290gr/m ²
Light Fastness	UV Resistant 7 - 8 (ISO 105 BO2)
Water Proofing	100%
> Spray test > Water column	5 (ISO 4920) 370mm
Oil Repellent Effect	5 (ISO 14419)
Care & Cleaning	With a soft cloth and running water
Warranty	7 YEARS

*Written Prices and processes are indicative of current production lots and are subject to a +/-4% tolerance










4



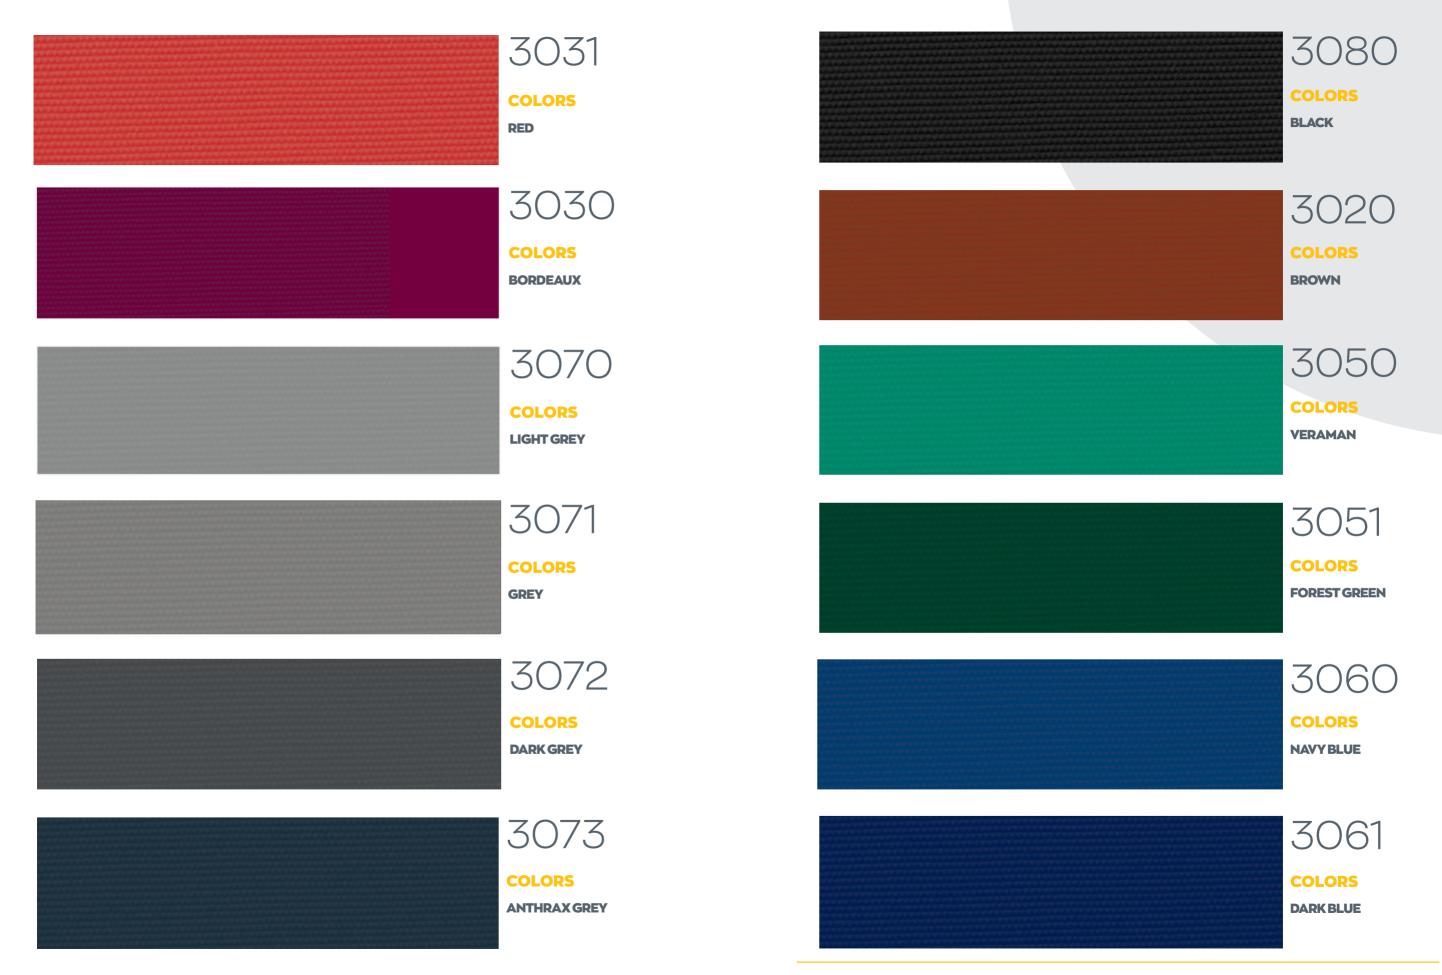






PROACRYL



ACRYLICS

PROTECTION company since 5 decades produces canvas 100% Acrylic, from certified ecological thread Dralon, breathable, suitable for the construction of professional umbrellas, cassetines, canopies, marine tops, seating fabrics, and other applications.

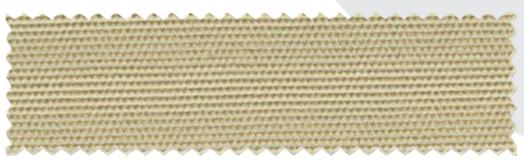

53 SKYROS



52 MYKONOS

Technical Data

Yarn	Acrylic 100 %
Туре	Dralon
Weight	320 gr/m² (DIN EN ISO 12127)
Width	160cm
Water Proofing 100%	Water column: 375mm (EN 20811) Spray test :100 (EN 24920)
Tensile strength	145/100 DAN/5cm (DIN EN ISO 13934-1)
Tear strength	3.5/3.00 DIN EN ISO 13937-2)
Light fastness	7-8 (DIN EN ISO 105- BO2)
OIL repellency effect:	6 - AATCC 118/EN 14419
Warranty	5 years

Written Prices and processes are indicative of current production lots and are subject to a +/-4% tolerance













